

Rolcontainer.mobi



GLOBAL MAIL LOGISTICS

Transport systems for mail dispatch and delivery





Rolcontainer.mobi

Grote Houw 152
4817 RJ BREDA
Netherlands



tel.: +31633638280



www.rolcontainer.mobi
info@rolcontainer.mobi

HOW YOU BENEFIT

CONCEPTION / INDIVIDUAL SOLUTIONS

Our highly qualified planners and developers are specialised to find holistic solutions for challenging tasks. In an ongoing dialogue with our customers, they work out and develop state-of-the-art product concepts tailored for specific business processes.

CONSTRUCTION / VISUALISATION

For project planning, we are using state-of-the-art 3D CAD systems. Even complex tasks can be completed with the highest level of precision. Production and functional capability can already be estimated during the construction process.

Interactive product animations are used to illustrate complex technologies in a comprehensible and impressive way. Our experts use virtual 3D presentations on the most modern CAD systems to visualise the precise realisation of individual customer demands.

PRODUCTION / MANUFACTURE

In our very own production we continuously carry out quality controls to maintain the highest level of quality for our products.

QUALITY

Rolcontainer.mobi products meet the strict safety standards of Deutsche Post, the Employer's Liability Insurance Associations and all relevant European standards. Our quality management system has been certified by the TÜV Rheinland Group according to ISO 9001.

SERVICE / CONSULTING

We offer professional repair and spare part services. - contact us.

Rolcontainer.mobi business areas

| The three categories |



GLOBAL MAIL LOGISTICS

Since 1995, we have successfully focused on developing high-performance products to ensure an international network of internal and external logistics for the letter and parcel delivery. These products have been distributed all over the world.

Rolcontainer.mobi's products such as the Ecoflex and Parcel Trolley have proved their value more than 100,000 times in the largest international postal companies.

On this basis, we offer our high performance products out of the the Global Mail program for courier, express and postal services, as well as in-house post offices of large companies.



INTRALOGISTICS

We optimise the material flow within and between the companies through future-oriented transport systems. Sophisticated, individual solutions and high quality serial products determine the power spectrum of the Rolcontainer.mobi Group.

Combining our core competencies, such as developing new products using the latest 3D-CAD systems, designing, producing, distributing and working in close cooperation with our customers, enable the implementation of individual solutions and therefore by doing this forming the key of our mutual success.



INDUSTRIAL SOLUTIONS

Since practically every company can use our equipment, but every industry needs „its“ own solution, we have designed our range of products to meet the requirements of specific industries.

For textile logistic companies, we offer an extensive range of containers for large laundry companies and the transportation of their laundry. Here we are especially proud of the success of our Combitainer Series Junior and Classic.

The supply logistics sector covers the requirements of retirement homes and hospitals. Examples of this segment include STAR-Collectors, Light Metal Containers and the comprehensive Kombix System.

Various transport equipment such as Stacking Carts and Platform Trolleys are positioned on the market to cover all industries. From the beverage industry to print offices, forwarding agents, or public authorities, etc. – Rolcontainer.mobi offers the ideal transport solution.

ROLLER CONTAINERS / CAGE TROLLEYS

01 Roller Containers / Cage Trolleys 4-23

02 Sorting / Mail Delivery Carts.....24-31

03 HERKULEX Hand Trucks.....32-43

04 Table Trolley.....44-45

05 Platform Trolley / Pallet Truck.....46-47



Our Roller / Cage Trolleys are daily being used in the largest international postal companies. Due to their high quality they guarantee a long service life.

Various Trolleys were especially designed for your logistical requirements.

> products

- Euro-LineTrolley E1
- Ecoflex
- SLC-Euro Trolleys
- MODUlette Standard
- MODUlette Safe
- Evoflex
- Roloflex
- Roller Container L2003
- Combaitainer Junior
- Combaitainer Classic
- Combaitainer Premium
- Combaitainer Safe
- Combaitainer Cargo
- Uniflex
- Accessories

> your advantages

- easy handling of heavy loads
- various versions for optimal transport
- ergonomically designed
- cost-effectiveness



> areas of application

- sorting
- storage
- transport
- order picking

■ Euro-Line Trolley E1

| The roller container with Euro dimensions |



information plate for use with chalk



separate foot lever for releasing the locking device



central locking device with foot-operated lever



handle with integrated service brake



easy to manoeuvre due to four swivel castors, one with directional lock

> technical details:

- very solid wall frame construction; one back wall and two front walls with wire grid mesh of 50 x 100 mm
- welded base frame made of highly robust steel profiles
- full floor covering with multi-bonded vehicle plywood board
- easy to manoeuvre even in confined space due to four swivel castors
- central lock with foot-operated lever

optional:

- virtual coupling and drawbar system
- shelf
- cover


serial running gear:

- 4 swivel castors, Ø 160 mm, one with automatic directional lock, which automatically returns to the locked position after being actuated, electrostatic discharge due to conductive super-elastic tyres, ball bearings in the live ring and wheel hub

article	art. no.	dimensions w x d x h approx. in mm	weight kg	load kg
Euro-Line Trolley E1	533-0000	1200 x 800 x 1600	60,0	350
shelf	533-0900	-	11,0	100

Ecoflex Standard

| The ideal solution |

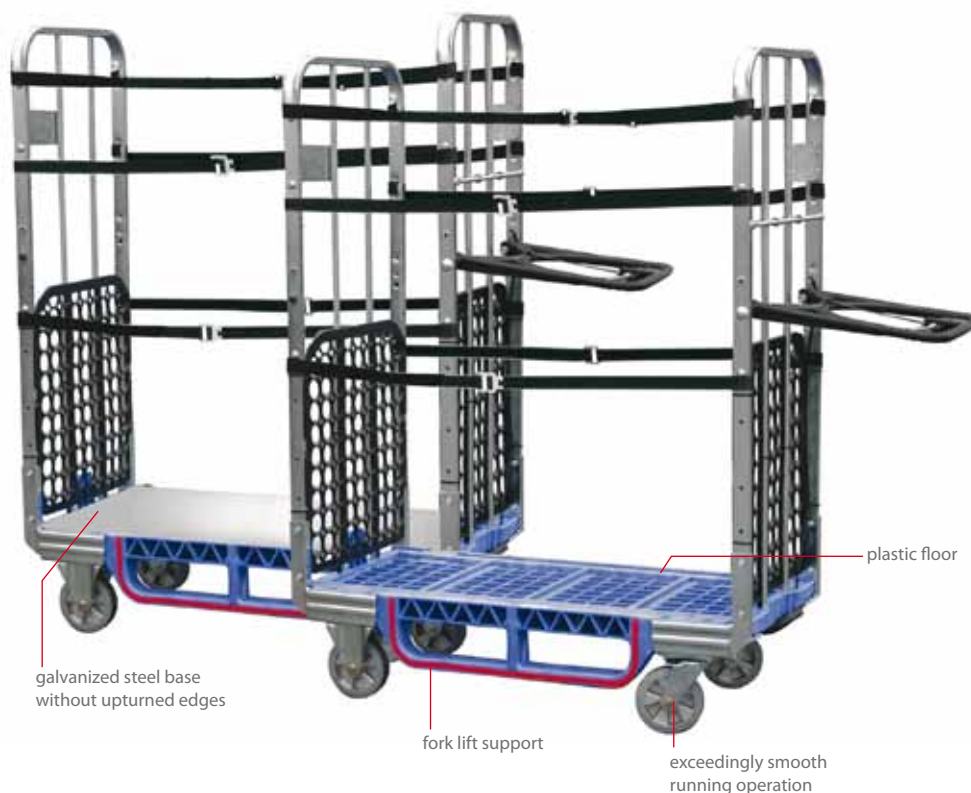

example with boxes



example with foldable side walls



economical fuel consumption
when driving in a convoy

> technical details:

- loading capacity: 300 kg (base)
- central lock with foot-operated lever
- pulling handle with handbrake
- truck compatible loading dimensions
- high stability when loading and unloading
- safety skids for fork lift loading

optional:

- coupling and drawbar

serial running gear:

- 2 swivel castors with integrated central locking system and 2 fixed castors, Ø 160 mm, with grey non-marking solid elastic tyres

article	art. no.	dimensions w x d x h approx. in mm
Ecoflex Standard	190-0006	1200 x 570 x 1600
Ecoflex with base cover	190-0009	1200 x 570 x 1600
Side wall bottom*	280-0000	to fit
Side wall top*	282-0000	to fit
Coupling	194-5000-S2	-
Drawbar	194-6000-S	-

*only for Ecoflex Standard without base cover. For larger quantities please contact us!



Ecoflex - international - individual

The letter-box trolley Ecoflex virtually meets all requirements of the international mail industry.

Due to modular plastic injection moulding technology, it is possible to individually adjust cavity sizes in the base for different letter container boxes.

The colour of this versatile product (plastic floor and front walls) can be adjusted with your desired RAL colour.



Ecoflex Standard

| Discover the diversity |



pulling handle

- hand brake lever
- easy to pull and push
- enormously flexible
- ergonomic height and design
- cold-insulating for your hands; no freezing
- easy to assemble and disassemble
- can be recycled
- low weight



coupling and drawbar

- optionally available with coupling and drawbar
- use in a convoy



central locking device with foot-operated lever

- both wheels are blocked regardless of their position
- braking effect in both directions
- simple operation by foot



synthetic floor and front walls

- can be recycled
- low weight
- robust, warp resistant, but still flexible
- permeable support plate (no water or dirt debris)
- absorbs shocks
- colour-fast, no marking-off or chipping
- high brand recognition



fixing straps

clip card

pulling handle with handbrake

optionally available with coupling and drawbar

central lock with foot-operated lever



plugged

suitable for letter trays




weather-proof

Ecoflex variations

| Versatile and flexible |



Ecoflex Commissioner with 3 shelves and inclined surface with upturned edges



holding device for secure position of the load



optionally available with coupling and drawbar



example with 2 shelves



convoy

> technical details:

- max. loading capacity without shelf: 300 kg
- max. loading capacity with shelf: 500 kg
- max. loading capacity per shelf: 100 kg
- shelves (with upturned edges)
- central lock with foot-operated lever
- pulling handle with handbrake
- truck compatible loading dimensions
- high stability when loading and unloading
- safety skids for fork lift loading

optional:

- coupling and drawbar

serial running gear:

- 2 swivel castors with integrated central locking system and 2 fixed castors, Ø 160 mm, with grey non-marking solid elastic tyres

article	art. no.	dimensions w x d x h approx. in mm
Ecoflex Etage, with 1 shelf	190-0007	1200 x 570 x 1600
Ecoflex Etage, with 2 shelves	190-0010	1200 x 570 x 1600
Ecoflex Commissioner	191-0007	1200 x 570 x 1600
shelf, with holding device	190-0002-ST	-
coupling	194-5000-S2	-
drawbar	194-6000-S	-

Ecoflex Motor

| Easy loading and unloading |



> technical details:

- loading capacity: approx. 300 kg distributed load (without shelf)
- high stability when loading and unloading
- ergonomic transport of heavy loads
- increases the productivity of employees
- adapts to operators walking speed
- effortless smooth driving
- the Ecoflex stops automatically if you let go of the rocker switch intentionally or by accident
- low-maintenance, minimal operating costs

optional:

- with or without shelves
- variable number of shelves
- coupling and drawbar

serial running gear:

- 2 swivel castors with integrated central locking system and 2 drive wheels, Ø 160 mm, with grey non-marking solid elastic tyres

article	art. no.	dimensions w x d x h approx. in mm
Ecoflex Motor	190-0006-E	1330 x 570 x 1600
Ecoflex Motor with 3 shelves	190-0026-E	1330 x 570 x 1600

SLC-Trolley 600

| The ideal solution for your SLCs |



> technical details:

- max. loading capacity: 300 kg without shelves
- max. loading capacity: 500 kg with shelves
- a robust, warp resistant, but still flexible synthetic floor, equipped with integrated safety runners for a secure fork lift loading
- a central locking device with a foot-operated lever guarantees a safe position eg. on inclined surfaces and during transportation
- ergonomically designed pulling handle with integrated handbrake made of shock absorbing synthetic material

optional (for all SLC's):

- coupling and drawbar

serial running gear:

- 2 swivel castors with integrated central locking system and 2 fixed castors Ø 160 mm
- with two-fold ball bearings in the live ring and wheel hub
- non-marking elastic solid rubber tyres

art. no.	dimensions
	w x d x h approx. in mm
262-0000	1300 x 580 x 1640
263-0000	1300 x 600 x 1640
264-0000	1300 x 580 x 1640

■ SLC-Trolley 600 E4.SAFE

| Lockable and non-transparent |

> technical details:

- loading space (shelf inner dimensions): approx. 1205 x 625 mm
- max. loading capacity (base): 300 kg
- max. loading capacity per shelf: 100 kg
- max. loading capacity: 500 kg
- equipped with two shelves and a galvanized steel base
- a welded steel frame construction equipped with integrated safety runners for a secure fork lift loading
- SAFE version (closed on top and three sides) with aluminum roller shutters one side (including lock)
- central locking device with foot-operated lever
- ergonomically designed pulling handle with integrated handbrake made of shock absorbing synthetic material

serial running gear:

- 2 swivel castors with integrated central locking system and 2 fixed castors Ø 160 mm
- with two-fold ball bearings in the live ring and in the hub
- non-marking elastic solid rubber tyres

art. no.	dimensions w x d x h approx. in mm
265-0097	1300 x 700 x 1800



■ SLC-Trolley 600 E4.SAFE-SV

| The rolling safe |

> technical details:

- max. loading capacity (base): 300 kg
- max. loading capacity per shelf: 150 kg
- max. loading capacity: 500 kg
- effective loading space: approx. 1215 x 600 mm
- a robust, warp resistant, but still flexible synthetic floor, equipped with integrated safety runners for a secure fork lift loading
- reinforced shelves
- vertical mounting hole patterns (in a distance of 100 mm) enable individual adjusting of shelf heights to meet changing needs
- central locking device with foot-operated lever
- ergonomically designed pulling handle with integrated handbrake made of shock absorbing synthetic material

serial running gear:

- 2 swivel castors with integrated central locking system and 2 fixed castors Ø 160 mm
- with two-fold ball bearings in the live ring and wheel hub
- non-marking elastic solid rubber tyres

art. no.	dimensions w x d x h approx. in mm
263-0013-GT	1500 x 630 x 1640



MODULette® Standard

| A top-class roller container |



can be nested to save space
-volume reduction of 60 %
for transport and storage



MODULette - international - individual



The components which are yellow and powder-coated in the standard version, can be coated with other RAL colours, for example the colour of your business.



coupling



drawbar

> technical details:

- plastic base with 600 kg loading capacity
- locking device with patented energy accumulator
- can be lined up beside each other to save space
- volume reduction of 60 % for transport and storage
- operation of all functional components possible from an upright position
- safety handle and additional grab handles enable safe manoeuvring
- fitted as standard with coupling and drawbar

optional:

- cover
- shelf

art. no. 110-3000

serial running gear:

- 4 swivel castors, 2 with integrated directional locks, Ø 140 mm, with elastic solid rubber tyres

art. no.	dimensions (outside) w x d x h approx. in mm	dimensions (inside) w x d x h approx. in mm
133-0000	1280 x 1000 x 1880	1150 x 920 x 1670

MODULette® SAFE | The safe version |



technical details:

- plastic base with 600 kg loading capacity
- locking device with patented energy accumulator
- can be lined up beside each other to save space
- volume reduction of 60 % for transport and storage
- operation of all functional components possible from an upright position
- SAFE version with roof and doors
- safety handle and additional grab handles enable safe manoeuvring
- fitted as standard with coupling and drawbar
- door can be opened 270°

- optional:
- cover
 - shelf

art. no. 110-3000

- serial running gear:
- 4 swivel castors, 2 with integrated directional locks, Ø 140 mm, with elastic solid rubber tyres

art. no.	dimensions (outside) w x d x h approx. in mm	dimensions (inside) w x d x h approx. in mm
133-0002	1280 x 1000 x 1880	1150 x 920 x 1670



can be nested to save space
-volume reduction of 65 %



example of use



> technical details:

- painted and powder-coated walls, wire mesh roof and two swing doors made of a solid grid construction (SAFE design)
- fitted with 50 x 50 mm wire mesh
- mechanical locking device on the back side to easily jack up even with high loads
- volume reduction of 65 % for transport and storage
- solid wooden base (can be folded up) with up to 500 kg loading capacity
- grab handle guarantees safe manoeuvring and easy operation
- lockable

serial running gear:

- 4 swivel castors of PP plastic, Ø 125 mm, white

art. no.	dimensions (outside) w x d x h approx. in mm	dimensions (inside) w x d x h approx. in mm
134-9003	1180 x 985 x 1970	1084 x 840 x 1750

Roloflex

| The solution for your transportation tasks |

> technical details:

- net weight only 50 kg (without doors)
- blue powder-coating for optimum surface protection
- can be nested to save space for transport and storage
 - volume reduction of 70 %

optional:

- with up to three shelves
- with doors

serial running gear:

- 4 swivel castors, Ø 125 mm, PP plastic, white, 2 with locks, with large thread guards

article	art. no.	dimensions w x d x h approx. in mm
Roloflex Standard	420-0003	1100 x 800 x 1700
doors	420-5000	to fit
shelf	420-9000	to fit



Roller Container L2003

| Move heavy loads easily |

> technical details:

- very solid sectional steel construction
- loading capacity of up to 800 kg
- durable surface protection due to hot-dip galvanising
- ergonomic handles
- information board with insert pocket
- excellent stability due to central lock with foot-operated lever
- foldable floor, can be nested when empty to save space
- space requirements reduced by approx. 70 %

serial running gear:

- 2 swivel and 2 heavy-duty fixed castors, Ø 125 mm, elastic solid rubber tyres, with thread guards,
- swivel castors with double-stop function and inner swivel radius



art. no.	dimensions w x d x h approx. in mm
195-0000	600 x 1000 x 1520

Combitainer - Cage Trolley

| Junior series |



example with shelf



example with shelf



> technical details:

- solid, galvanised and yellow chromated construction made of a tubular steel frame and steel rods
- consisting of two side walls, one back wall and one floor construction made of sectional tubes including phenolic resin plate
- horizontally divided foldable/swing door
- information plate on the back wall

optional:

- foldable shelf
- without door

serial running gear:

- 2 swivel and 2 fixed castors, Ø 108 mm, PP plastic
- castors can be changed on request (see p. 22)

type / size	art. no.	dimensions w x d x h approx. in mm	effective height approx. in mm
Junior S	327-0010	600 x 720 x 1150	1000
Junior M	327-0020	600 x 720 x 1350	1200
Junior X	327-0030	600 x 720 x 1520	1350
Junior XL	327-0040	600 x 720 x 1730	1570
shelf Junior S-XL	327-9000	600 x 720	-

Combitainer - Cage Trolley

| Classic series |



example with shelf



example of use

> technical details:

- solid, galvanised and yellow chromated construction made of a tubular steel frame and steel rods
- consisting of two side walls, one back wall and one floor construction made of sectional steel tubes and grid rods
- horizontally divided foldable/swing door
- information plate on the back wall

optional:

- foldable shelf
- without door

serial running gear:

- 2 swivel and 2 fixed castors, Ø 108 mm, PP plastic
- castors can be changed on request (see p. 22)

type / size	art. no.	dimensions w x d x h approx. in mm	effective height approx. in mm
Classic M	324-0030	720 x 810 x 1350	1200
Classic X	324-0000	720 x 810 x 1520	1350
Classic XL	324-0010	720 x 810 x 1650	1450
Classic XXL	324-0020	720 x 810 x 1850	1650
shelf Classic M-XXL	324-9000	720 x 810	-

Combitainer - Cage Trolley

| Premium series |



your advantages

- incl. grid floor
- 50 x 50 mm grid panelling



example with shelf



> technical details:

- solid, galvanised and yellow chromated construction made of steel rods, with 50 x 50 mm grid panelling and a tubular steel frame
- horizontally divided foldable/swing door
- grid floor
- Information plate on the back wall

optional:

- shelf


serial running gear:

- 2 swivel and 2 fixed castors, Ø 108 mm, PP plastic
castors can be changed on request (see p. 22)

type / size	art. no.	dimensions w x d x h approx. in mm	effective height approx. in mm
Premium S	325-0010	810 x 580 x 1520	1350
Premium M	325-0020	810 x 580 x 1820	1650
Premium X	325-0030	720 x 810 x 1520	1350
Premium XL	325-0040	720 x 810 x 1820	1650
shelf Premium S-M	325-9000	810 x 580 wire mesh shelf, foldable	-
shelf Premium X-XL	324-9000	720 x 810 wire mesh shelf, foldable	-

Combitainer - Cage Trolley

| SAFE series |

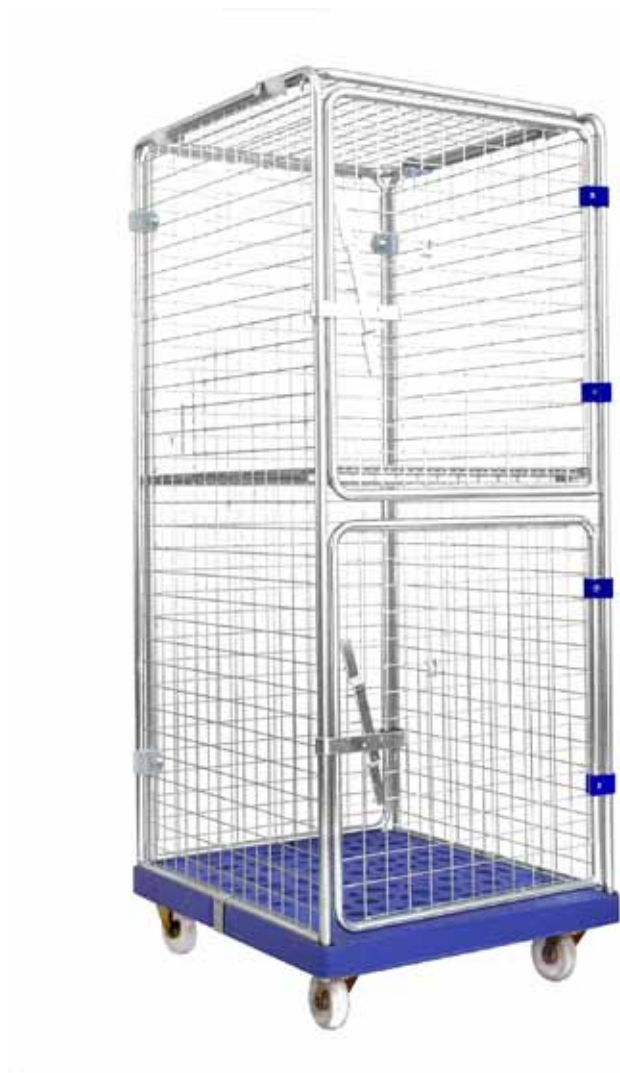

your advantages

- additional locking option
- closed construction



additional locking option
(example)



example with shelf

> technical details:

- solid, galvanised and blue chromated construction made of steel rods with 50 x 50 mm grid panelling and a tubular steel frame
- effective height: approx. 1650 mm
- closed construction type, including grid roof to prevent theft
- centrally divided, two-wing wire frame door, together with a sliding bolt for locking
- additional locking option (padlock required)
- exceptionally solid plastic floor made of high-impact proof PE

optional:

- shelf to create two separate compartments

art. no. 325-9050

serial running gear:

- 2 swivel and 2 fixed castors, Ø 108 mm, PP plastic
castors can be changed on request (see p. 22)

art. no.	dimensions w x d x h approx. in mm
325-0050	720 x 810 x 1820

Combitainer - Cage Trolley

| Cargo series |



easy to fold

Single elements, such as roof, side walls and shelf are locked safely.



space-saving storage and transport

Due to the tapered floor substructure the Cargo cage trolley is particularly space-saving.

> technical details:

- solid, galvanised and blue chromated steel frame construction with 45 x 50 mm grid panelling
- easy handling and maximum functionality for storing and transporting all kinds of goods
- closed construction type, particularly safe
- can be nested to save space
- volume reduction of 70 % for transport and storage

optional:

- shelf (loading capacity: 150 kg)

serial running gear:

- 2 swivel and 2 fixed castors, Ø 108 mm, PP plastic
- castors can be changed on request (see p. 22)

art. no. 322-6000-03

art. no.	dimensions
	w x d x h approx. in mm
322-8001	740 x 860 x 1740



loading
capacity



your advantages

- in three different heights
- loading capacity of up to 500 kg



example of use

> technical details:

- high loading capacity of up to 500 kg
- solid, galvanised and yellow chromated side walls
- panelling with four vertical rods and two horizontal flat rods
- solid plastic pallet with steel inserts and protectors for fixed castors
- side walls available in three different heights
- easy to assemble and disassemble
- including two tension straps

serial running gear:

- 2 swivel and 2 fixed castors, Ø 108 mm, PP plastic
castors can be changed on request (see p. 22)

type / size	art. no.	dimensions w x d x h approx. in mm	effective height approx. in mm
Uniflex X	324-0000-02	720 x 810 x 1520	1350
Uniflex XL	324-0010-02	720 x 810 x 1620	1450
UniflexXXL	324-0020-02	720 x 810 x 1820	1650

Accessories for Cage Trolleys

| Give your container an individual design |



article	total height approx. in mm	art. no.
swivel castor, Ø 108 mm, PP plastic	132	324-4101



article	total height approx. in mm	art. no.
fixed castor, Ø 108 mm, PP plastic	132	324-4102



article	total height approx. in mm	art. no.
swivel castor with brake, Ø 100 mm, PP plastic	132	320-9052



article	total height approx. in mm	art. no.
fixed castor, with thread guards, Ø 125 mm, rubber, grey	150	320-9002



article	total height approx. in mm	art. no.
swivel castor, with thread guards, Ø 125 mm, rubber, grey	150	320-9001



article	total height approx. in mm	art. no.
swivel castor with brake, with thread guards, Ø 125 mm, rubber, grey	150	320-9003



article	art. no.
elastic rubber strap for combitainer, grey, one-piece, 780 mm	325-0400



article	art. no.
elastic textile strap, two-piece	321-0300



article	art. no.
bumper, rubber, grey	070-0100-VK



article	art. no.
clipboard, DIN A4, with stainless steel clip	321-2300



article	art. no.
clothes rod, 600 mm	327-7000-S
clothes rod, 720 mm	324-6000-S
clothes rod, 810 mm	325-6000-S

SORTING / MAIL DELIVERY CARTS

01 Roller Containers / Cage Trolleys 4-23

02 Sorting / Mail Delivery Carts.....24-31

03 HERKULEX Hand Trucks32-43

04 Table Trolley44-45

05 Platform Trolley / Pallet Truck46-47

Our Mail Delivery and Sorting Trolleys are being developed together with large renowned companies for the in- and outdoor distribution and are essential for the sorting and distribution in any company with large quantities of mail.

> products

- Mail Delivery Cart Trio
- Mail Delivery Cart Quatro
- Mail Delivery Cart Vario
- Mail Delivery Cart Duo+
- Professional Series of Cart Bags
- Distriflex

> your advantages



- universal combination possibilities
- long service life
- easy manoeuvring
- low empty weight
- maximum loading capacity
- ergonomic transport of heavy loads

> areas of application

- secure transport
- clearly arranged sorting
- orderliness



■ Mail Delivery Cart Trio

| The professional mail delivery cart |



your advantages

- height-adjustable handle
- easy manoeuvring



„Trio“ for 3 bags



hydraulic locking brake

> technical details:

- max. loading capacity: 80 kg
- easy manoeuvring due to ideal weight distribution
- solid but lightweight steel construction, galvanised and yellow chromated
- hydraulic locking brake
- height-adjustable handle with bell
- cart bags not included

- accessories (see p. 29)

serial running gear:

- with exceptionally smooth movement

art. no.	dimensions (without handle) w x d x h approx. in mm
BZW 3000	810 x 570 x 920

■ Mail Delivery Cart Quattro

| The professional mail delivery cart |



your advantages

- height-adjustable handle
- easy manoeuvring



„Quattro“ for 4 bags



„Quattro“ with swivel wheel



hydraulic locking brake



swivel wheel
guaranteed straight running
without the need to raise
front wheel

> technical details:

- max. loading capacity: 80 kg
- easy manoeuvring due to ideal weight distribution
- solid but lightweight steel construction, galvanised and yellow chromated
- hydraulic locking brake
- height-adjustable handle with bell
- running gear with exceptionally smooth movement
- cart bags not included

- accessories (see p. 29)

serial running gear:

- with exceptionally smooth movement

article	art. no.	dimensions (without handle) w x d x h approx. in mm
Mail Delivery Cart Quattro	BZW 4000	1070 x 570 x 920
Quattro with swivel wheel	BZW 4000-01	1070 x 570 x 920

■ Mail Delivery Cart Vario

| The manoeuvrable professional postman's trolley |



free access when cover is folded back



secure transport even of extra large mail items



hydraulic locking brake

> technical details:

- max. loading capacity: 80 kg
- mixed bag/box combination including cover if required
- easy handling due to optimal weight distribution
- stable although a light steel pipe construction, galvanized and yellow chromated
- guaranteed straight running without the need to raise front wheel
- hydraulic locking brake
- height-adjustable handle with bell
- running gear with exceptionally smooth movement
- the front wheel is available as a swivel and/or a fixed wheel

- plastic boxes and cart bags not included
- accessories (see p. 29)

serial running gear:

- with exceptionally smooth movement

article	art. no.	dimensions (without handle) w x d x h approx. in mm
Mail Delivery Cart Vario	530-0000	900 x 625 x 800
Vario with fixed wheel	530-9001	900 x 625 x 800

Mail delivery cart Duo+

| The professional mail delivery cart |



your advantages

- net weight: only 13 kg
- foldable



> technical details:

- max. loading capacity: 90 kg
- net weight: 13 kg
- easy manoeuvring due to ideal weight distribution
- solid but lightweight steel construction (weight: 13 kg)
- foldable
- guaranteed straight running without the need to raise the front wheel
- hydraulic locking brake
- height-adjustable handle with bell
- cart bags not included

serial running gear:

- with exceptionally smooth movement

art. no.	dimensions
	w x d x h approx. in mm
532-0000	770 x 610 x 910

■ Professional Series of Cart Bags

| For Trio / Quattro / Vario and Duo+ |



cart bags blue or yellow



cover for plastic box, blue or yellow



plastic box, red



plastic box, blue



water-repellent

> technical details:

bags

- water-repellent
- highly tear-resistant material
- with reinforced base and side walls
- with attachment hook for the mail delivery cart

boxes

- plastic boxes and lids available in red (RAL3020) and blue (RAL5002)

article	art. no.	dimensions w x d x h approx. in mm
cart bag, blue	WT 646-110-052	to fit
cart bag, yellow	WT 646-110-051	to fit
plastic box, blue (RAL 5002)	190-BOX-02	470 x 267 x 210
lid for plastic box, blue (RAL 5002)	190-BOX-02-D	to fit
plastic box, red (RAL 3020)	190-BOX-03	470 x 267 x 210
lid for plastic box, red (RAL 3020)	190-BOX-03-D	to fit
cover for plastic box, blue	530-1201	to fit
cover for plastic box, yellow	530-1200	to fit



DIN A4

- alternatively available for A4 size folders (please ask us)



note pad holder

- note pad holder, made of plexiglas also available art.no.: SAL440



hanging folders BY Rolcontainer. mobi ONLY

- highly-tear resistant synthetic material, strengthened by horizontally and vertically incorporated weave
- spaciouly designed and suitable for filing large envelopes, journals, etc



example V4090OZ

> technical details:

- max. loading capacity 150 kg
- high-quality chrome-plated steel for an elegant appearance and a long service life
- due to the modular design, individual adaptations (e.g. trolley length) can be done immediately
- convenient sizes
- always equipped with 2 handles
- adjustable shelf height

serial running gear:

- 4 swivel castors, 2 with brakes, outstanding running characteristics, Ø 125 mm, rubber, grey

Distriflex V4090 MZ / V4010 MZ additionally equipped with:

- wire edging on the intermediate and bottom shelves
- one wire basket
- two adjustable compartment dividers

art. no.	base approx. in mm	dimensions (outside) (w x d x h) approx. in mm
V4090MZ	914 x 457	1224 x 457 x 1010
V4010MZ	1067 x 457	1377 x 457 x 1010
V4090OZ	914 x 457	1154 x 457 x 1010
V4010OZ	1067 x 457	1307 x 457 x 1010



> technical details:

- max. loading capacity: 150 kg
- label frames for identifying the compartments
- compartment dividers can be adjusted as required
- side rods guarantee better retention of stored items during transport
- also available without wheels; in various sizes

serial running gear:

- 4 swivel castors, 2 with brakes, outstanding running characteristics, Ø 125 mm, rubber, grey

art. no.	base approx. in mm	dimensions (outside) (w x d x h) approx. in mm
M4090MZ	914 x 457	1154 x 457 x 1270
M4010OZ	1067 x 457	1377 x 457 x 1010
S4010M	1067 x 457	1307 x 457 x 1270
S4010H	1067 x 457	1307 x 457 x 1545

HERKULEX HAND TRUCKS

01 Roller Containers / Cage Trolleys 4-23

02 Sorting / Mail Delivery Carts.....24-31

03 HERKULEX Hand Trucks.....32-43

04 Table Trolley44-45

05 Platform Trolley / Pallet Truck.....46-47

Our Herkulex Hand Trucks are made of aluminium or stainless steel, guaranteeing maximum stability and security. Foldable or static, soft-touch rubber or pneumatic wheels — various designs offer an optimal solution for every logistical requirement.

> products

- Parcel and Letter Truck HERKULEX Series
- Professional Multi-Purpose Cart HERKULEX Series
- XXL-Alu-Power HERKULEX Series
- Folding Truck HERKULEX Series
- Accessories


> your advantages



- easy and safe transport
- high quality aluminium or stainless steel
- partially space saving and foldable
- low empty weight (aluminium)

> areas of application

- transport of high-quality goods
- transport of damageable and heavy loads

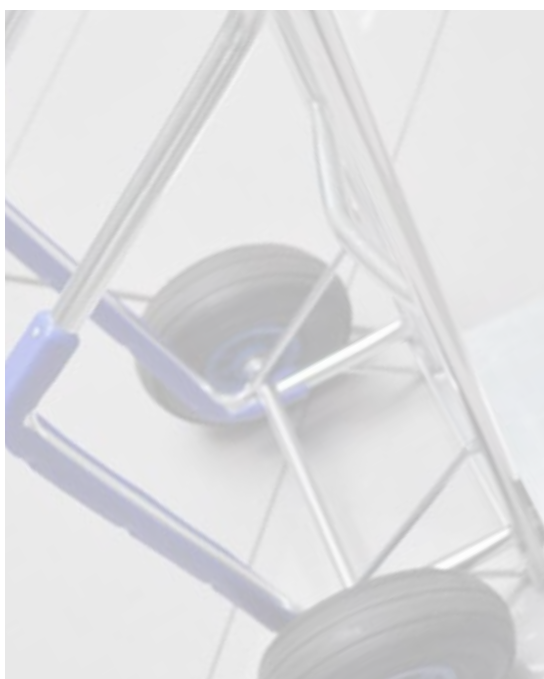

Parcel and Letter Truck

| HERKULEX Series |



example with boxes



accessories (p. 42-43)



board (advert.)



wire basket



wire basket



wire basket



cover



plastic box



plastic box



optional footplate (p. 42)



tubular footplate foldable

> technical details:

- max. loading capacity: 125 kg
- axle width approx. 475 mm
- footplate (l x w) approx. 430 x 280 mm
- height: approx. 1100 mm
- net weight: approx. 12 kg
- vertical oval tubes made of high-strength aluminium alloy
- continuous row of holes for suspending wire baskets
- high-strength polyamide support and safety skids
- foldable aluminium tubular footplate, made of specially resistant aluminium profiles
- cross-bars straight
 - also available curved (bag format)
- three centre struts for transporting smaller mail pieces safely

- wheel guard and footplate made of particularly shock-resistant diecast aluminium
- folding trap made of zincc-coated steel profile to secure the footplate when parking the loaded cart

serial running gear:

- Soft-Touch tyres, Ø 200 mm
- water- and dustproof precision ball bearings

art. no. SK125-02

Parcel and Letter Truck

| HERKULEX Series |



including two wire baskets



can be folded to save space



accessories (p. 42-43)



board (advert.)



wire basket



wire basket



wire basket



cover



plastic box



plastic box



optional footplate (p. 42)



tubular footplate foldable

> technical details:

- max. loading capacity: 125 kg
- axle width: approx. 475 mm
- footplate (l x w) approx. 430 x 280 mm
- height approx. 1100 mm
- height when folded: 710 mm
- net weight: approx. 12 kg
- vertical oval tubes made of high-strength aluminium alloy
- continuous row of holes for suspending wire baskets
- foldable beams made of shock-resistant aluminium die casting (protected by sliding sleeves made of aluminium tube)
- high-strength polyamide support and safety skids
- foldable aluminium tubular footplate, made of shock-resistant aluminium profiles
- upper cross-bar curved, also available in straight version
- lower and middle plastic cross-bars straight for particularly safe transport of mail — also available in curved version (bag format)
- three vertical braces at the bottom for transporting even smaller parcels and letters safely
- wheel guards and footplate made of particularly shock-resistant diecast aluminium
- folding trap made of zinc-coated steel profile to secure the footplate in standing position when loaded

serial running gear:

- Soft-Touch tyres, Ø 200 mm
- water- and dustproof precision ball bearings

art. no. SK125-18



accessories (p. 42-43)



board (advert.) wire basket



wire basket wire basket



cover plastic box



plastic box



optional footplate (p. 42)



tubular footplate foldable

> technical details:

- max. loading capacity: 125 kg
- axle width: approx. 475 mm
- footplate (l x w) approx. 430 x 280 mm
- height approx. 1100 mm
- vertical oval tubes made of high-strength aluminium alloy
- angled high-strength polyamide support and safety skids
- foldable aluminium tubular footplate
- upper cross-bars curved, otherwise straight
- wheel guards and footplate made of shock-resistant diecast aluminium

serial running gear:

- Soft-Touch tyres, Ø 200 mm
- water- and dustproof precision ball bearings

art. no.	weight kg
SK125-20	11
SK125-06	12

Parcel and Letter Truck

| HERKULEX Series |



> technical details:

- max. loading capacity: 125 kg
- axle width: approx. 475 mm
- footplate (l x w) approx. 430 x 280 mm
- height approx. 1100 mm
- net weight: approx. 9 kg
- vertical oval tubes made of high-strength aluminium alloy
- foldable aluminium tubular footplate
- cross-bars straight
- one vertical brace
- wheel guards and footplate made of shock-resistant diecast aluminium

serial running gear:

- Soft-Touch tyres, Ø 200 mm
- water- and dustproof precision ball bearings

art. no. SK125-05



tubular footplate foldable



optional footplate (p. 42)

Parcel and Letter Truck

| HERKULEX Series |



> technical details:

- max. loading capacity: 125 kg
- axle width: approx. 475 mm
- footplate (l x w) approx. 430 x 280 mm
- height approx. 1250 mm
- net weight: approx. 9,4 kg
- vertical oval tubes made of high-strength aluminium alloy
- safety handles
- foldable aluminium tubular footplate
- cross-bars straight
- one vertical brace
- wheel guards and footplate made of shock-resistant diecast aluminium

serial running gear:

- Soft-Touch tyres, Ø 200 mm
- water- and dustproof precision ball bearings

art. no. SK125-15



tubular footplate foldable



optional footplate (p. 42)

Parcel and Letter Truck

| HERKULEX Series |



example of use



can be folded to save space



accessories (p. 42-43)



board (advert.)



wire basket



wire basket



wire basket



cover



plastic box



plastic box



optional footplate (p. 42)



shock absorbent

> technical details:

- max. loading capacity: 125 kg
- axle width: approx. 475 mm
- footplate (l x w) approx. 430 x 280 mm
- height approx. 1100 mm
- height when folded: 710 mm
- net weight: approx. 12 kg
- vertical oval tubes made of high-strength aluminium alloy
- continuous row of holes for suspending wire baskets
- foldable beams made of shock-resistant aluminium die casting (protected by sliding sleeve made of aluminium tube)
- foldable aluminium tubular footplate, made of shock-resistant aluminium profiles
- upper cross-bar curved, also available in straight version
- middle and lower cross-bars straight - also available curved (bag format)

- three vertical braces at the bottom for transporting even smaller parcels and letters safely
- wheel guards and footplate made of particularly shock-resistant diecast aluminium
- folding trap made of zinc-coated steel profile to secure the footplate in standing position when loaded

serial running gear:

- Soft-Touch tyres, Ø 200 mm
- water- and dustproof precision ball bearings

art. no. SK125-01

Parcel and Letter Truck

| HERKULEX Series |



> technical details:

- max. loading capacity: 125 kg
- axle width: approx. 530 mm
- footplate (l x w) approx. 430 x 340 mm
- height approx. 1300 mm
- net weight: approx. 11 kg
- vertical oval tubes made of high-strength aluminium alloy
- closed handle
- foldable aluminium tubular footplate
- cross-bars straight
- two vertical brace
- high-strength polyamide support and safety skids

- including advertising board (foil imprint must be provided)
- wheel guards and footplate made of particularly shock-resistant diecast aluminium


serial running gear:

- Soft-Touch tyres, Ø 200 mm
- water-proof and dustproof precision ball bearings

art. no. SK125-17

Professional Multi-Purpose Cart with box holder

| HERKULEX Series |

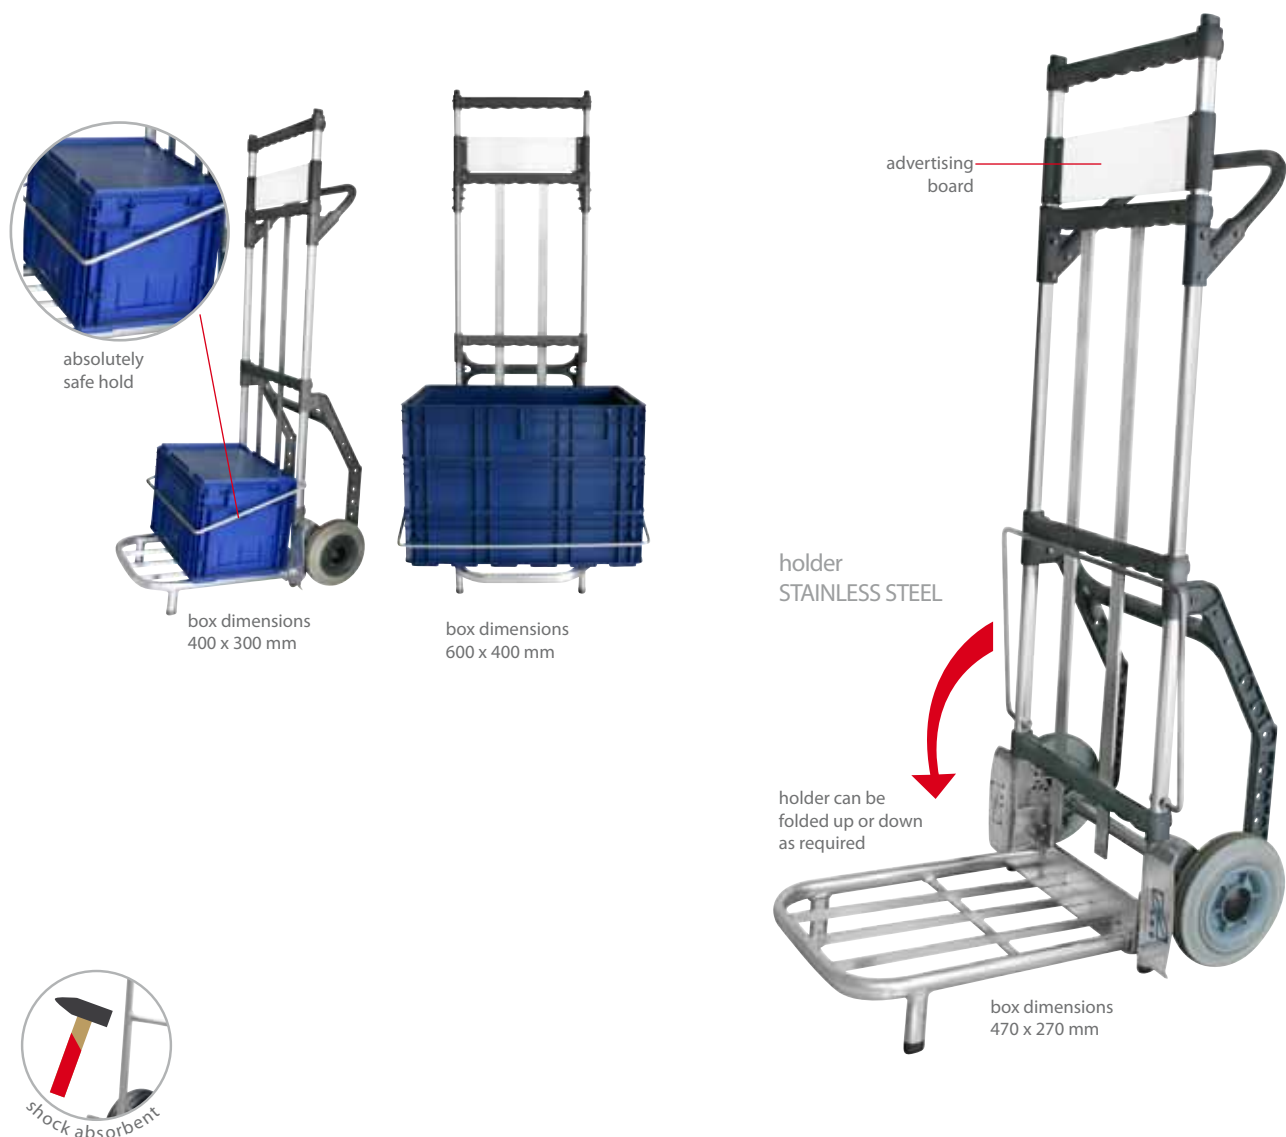

> technical details:

- max. loading capacity: 125 kg
- axle width: approx. 530 mm
- footplate (l x w) approx. 430 x 340 mm
- height approx. 1300 mm
- net weight: approx. 11 kg
- box holder reliably holds a stack of boxes in position
- vertical oval tubes made of high-strength aluminium alloy
- closed handle
- foldable aluminium tubular footplate
- cross-bars straight
- two vertical brace
- high-strength polyamide support and safety skids

- including advertising board (foil imprint must be provided)
- wheel guards and footplate made of particularly shock-resistant diecast aluminium

serial running gear:

- Soft-Touch tyres, Ø 200 mm
- water- and dustproof precision ball bearings

art. no.	holder for box approx. in mm (w x d)
SK125-17 with B01	300 x 400
SK125-17 with B02	600 x 400
SK125-17 with B03	470 x 270

> technical details:

- max. loading capacity: 150 kg
- dimensions when extended (l x w x h): approx. 590 x 600 x 1270 mm
- dimensions when folded (l x w x h): approx. 590 x 60 x 1000 mm
- axle width: approx. 890 mm
- footplate (l x w) approx. 590 x 390 mm
- height approx. 1270 mm
- net weight: approx. 12,6 kg
- padded handle, additional standard handle
- vertical oval tubes made of high-strength aluminium alloy
- sturdy aluminium footplate with large loading area
- foldable handles for heavy loads
- foldable and easy to store

serial running gear:

- Ø 200 mm, with non-marking rubber tyres

art. no. KK200

can be folded to save space



Folding Truck
| HERKULEX Series |

> technical details:

- max. loading capacity: 90 kg
- axle width: approx. 490 mm
- footplate (l x w) approx. 340 x 490 mm
- height approx. 1100 mm
- height telescoped: 800 mm
- net weight: approx. 4,5 kg
- designed for loads of up to 90 kg
- easy to convert from mini to maxi

serial running gear:

- Ø 170 mm, with non-marking rubber tyres

can be folded to save space



art. no. KK125

Folding Truck

| HERKULEX Series |



> technical details:


- max. loading capacity: 50 kg
- axle width: approx. 400 mm
- footplate (l x w) approx. 280 x 390 mm
- height: approx. 1000 mm
- height telescoped: 640 mm
- net weight: approx. 3,5 kg
- high-class design and outstanding processing
- multiple height adjustment options
 - can be adapted to body height
- can be folded to save space
- very versatile in use

serial running gear:

- Ø 125 mm, with non-marking rubber tyres

art. no. KK50-01

can be folded to save space

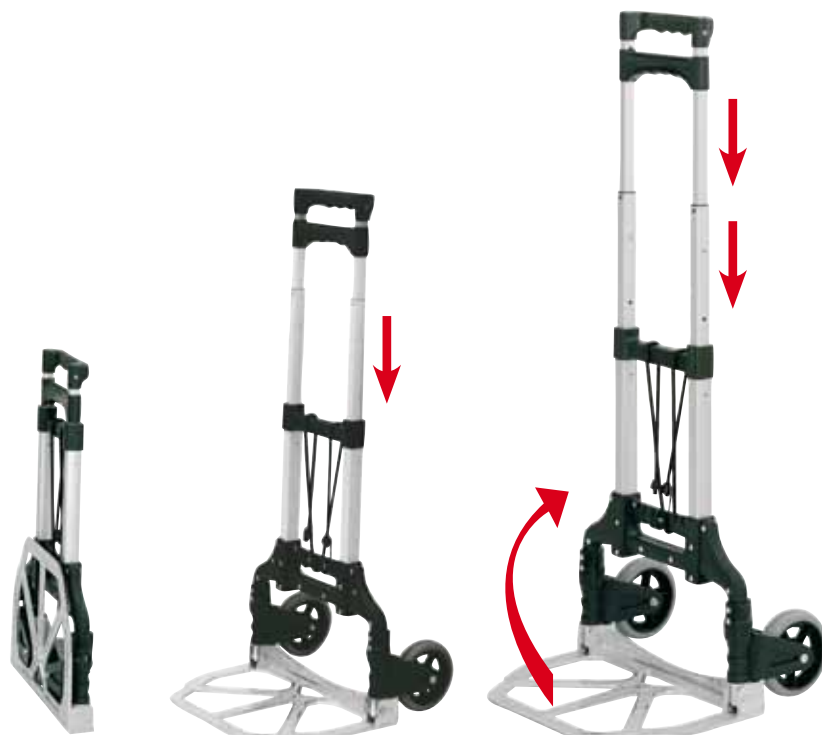

Foldable Hand Truck

| Ready for use |



> technical details:

- max. loading capacity: 90 kg
- chromium plate handle, ergonomic design
- dimensions when ready for use (l x w x h):
approx. 350 x 430 x 1008 mm
- dimensions when folded together (l x w x h):
approx. 350 x 430 x 720 mm
- footplate (l x w) approx. 250 x 350 mm
- net weight only 7 kg approx.
- vertical oval tubing made of high-strength aluminium alloy
- strong steel foot-plate with large loading surface
- foldable and practical for storing away
- TÜV Süd, tested for safety

serial running gear:

- Ø 150 mm, 2 solid rubber wheels with ball bearings

art. no. KK100-LB

can be folded to save space



■ Accessories for Hand Trucks

| Design your own hand truck |



article	art. no.	dimensions w x d x h approx. in mm
wire basket, small	SK125-01-200	140 x 485 x 285



article	art. no.	dimensions w x d x h approx. in mm
wire basket, small	GK130	130 x 440 x 190



article	art. no.	dimensions w x d x h approx. in mm
wire basket, large	GK255	255 x 440 x 190



article	art. no.	dimensions w x h approx. in mm
advertising board	WT125-01	260 x 100 (advertising space)



If you wish to receive the optional footplate instead of the tubular footplate, please specify the addendum -ZB01 after the art. no.

article	art. no.	dimensions w x d approx. in mm
footplate, foldable-ZB01	280 x 300



article	art. no.	dimensions w x d x h approx. in mm
cover for plastic box, blue	SK125-01-301	to fit
cover for plastic box, yellow	SK125-01-300	to fit



article	art. no.	dimensions w x d x h approx. in mm
plastic box, blue (RAL 5002)	190-BOX-02	470 x 267 x 210
lid for plastic box, blue (RAL 5002)	190-BOX-02-D	to fit



article	art. no.	dimensions w x d x h approx. in mm
plastic box, red (RAL 3020)	190-BOX-03	470 x 267 x 210
lid for plastic box, red (RAL 3020)	190-BOX-03-D	to fit

TABLE TROLLEY

01 Roller Containers / Cage Trolleys 4-23

02 Sorting / Mail Delivery Carts.....24-31

03 HERKULEX Hand Trucks.....32-43

04 Table Trolley44-45

05 Platform Trolley / Pallet Truck.....46-47

Our Table Trolleys facilitate your daily work considering ergonomic handling and stand out due to their versatile functionality.

> products

- Montiflex

> your advantages

- ergonomic workplace design
- versatile and convenient
- mobility
- long service life due to solid processing
- unlimited number of possible applications



> areas of application

- material supply
- sorting



Ergonomic design
for assembly areas!



> technical details:

820-0000

- shelves are nearly infinitely variable in slope and height
- basic frame made of solid welded and screwed rectangular tubing
- vertically adjustable in eight stages (total: 240 mm)
- angle of inclination adjustable in four stages
- max. loading capacity: 50 kg
- powder-coated in gentian blue RAL 5010
- shelf dimensions: 407 mm

serial running gear:

- 4 swivel castors, 2 lockable, Ø 100 mm

CWA1/2

- shelves are nearly infinitely variable in slope and height
- basic frame made of solid welded and screwed rectangular tubing
- max. loading capacity:: CWA1 150 kg; CWA2 50 kg
- powder-coated in azure blue RAL 5009

serial running gear:

- 4 swivel castors, 2 lockable, Ø 80 mm

art. no.	dimensions w x d x h approx. in mm	dimensions trays approx. in mm
820-0000	530 x 515 x 880	530 x 410
CWA1	710 x 410 x 1200	500 x 400
CWA2	510 x 475 x 1200	500 x 400

PLATFORM TROLLEY / PALLET TRUCK

01 Roller Containers / Cage Trolleys 4-23

02 Sorting / Mail Delivery Carts.....24-31

03 HERKULEX Hand Trucks32-43

04 Table Trolley44-45

05 Platform Trolley / Pallet Truck46-47

Our Pallet Trucks and Platform Trolleys facilitate the daily transport of various goods. The high quality constructions guarantee a long service life.

> products

- Platform Trolley KK300
- Pallet Truck


> your advantages



- high loading capacity at low empty weight
- space saving usage when not in use
- can be used for almost any application
- lifting load 2000 kg
- controlled lowering by means of a handgrip
- easy to manoeuvre
- ideal transport of pallets and crates

> areas of application

- general transport of heavy loads
- easy moving of heavy loads

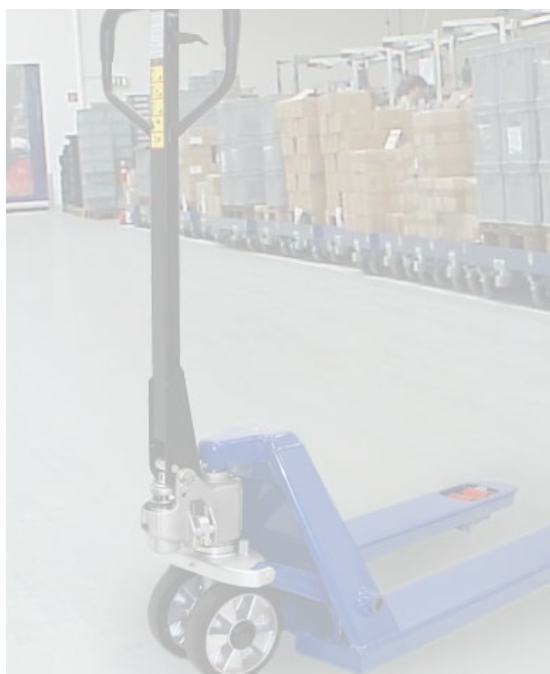

■ Platform Trolley KK300

| HERKULEX Series |



> technical details:

- max. loading capacity: 300 kg
- net weight: approx. 14 kg
- space-saving storage when not in use
- high-quality lightweight construction with low empty weight
- can be used for almost any application
- height when folded: 275 mm

serial running gear:

- 2 swivel and 2 fixed castors, Ø 125 mm, with non-marking rubber tyres

art. no.	dimensions w x d x h approx. in mm
KK300	900 x 610 x 960



can be folded to save space

■ Pallet Truck

| The practical warehouse helper |

> technical details:

- lifting load: 2000 kg
- pallet truck weight: 73 kg
- ideal transport of pallets and crates
- easy to manoeuvre
- controlled lowering by means of a handgrip
- robust hydraulic pump
- minimum fork height is 85 mm
- powder-coated
- lifting height: approx. 200 mm
- fork size: approx. 1150 x 540 mm

serial running gear:

- drawbar wheel: 200 x 50 mm, rubber tyre, fork wheels: 80 x 70 mm



convey with HERKULEX Pallet Truck and Euro Line Pallet Trolley



art. no. 720-0000

INDEX

| Find what you are looking for... |

A

Accessories for Cage Trolleys	22-23
Accessories for Hand Trucks	42-43

C

Combitainer Cage Trolleys	16-20
Combitainer Junior	16
Combitainer Classic	17
Combitainer Premium	18
Combitainer SAFE	19
Combitainer Cargo	20

D

Distriflex	30-31
------------------	-------

E

Euro-Line Trolley E1	5
Ecoflex Standard	6-7
Ecoflex Variation	8
Ecoflex Motor	9
Evoflex	14

F

Folding Truck	40-41
---------------------	-------

H

Hand Trucks	32-43
-------------------	-------

M

MODULette Standard	12
MODULette SAFE.....	13
Montiflex	45
Mail Delivery Carts	25-28
Mail Delivery Cart Trio	25
Mail Delivery Cart Quattro	26
Mail Delivery Cart Vario	27
Mail Delivery Cart Duo+.....	28
Multi-Purpose Cart with box holder	39

P

Professional Series of Cart Bags	29
Parcel and Letter Truck	33-38
Platform Trolley KK300	47
Pallet Truck.....	47

R

Roloflex	15
Roller Container L2003	15

S

SLC-Trolley 600 E1	10
SLC-Trolley 600 ES3	10
SLC-Trolley E3S	10
SLC-Trolley 600 E4.SAFE	11
SLC-Trolley 600 E4.SAFE-SV	11
Sorting Carts	30-31

T

Table Trolley	45
---------------------	----

U

Uniflex	21
---------------	----

X

XXL Alu-Power	40
---------------------	----

Rolcontainer.mobi - your expert for transport equipment

| Always the best solution |

Apart from Global Mail Logistics, we also work in the fields of Intralogistics and Industrial Solutions both nationally and internationally and offer innovative individual and comprehensive solutions.



INTRALOGISTICS



With ideal control and coordination of the material flow with custom-made transport equipment for high-performance intralogistics, we make it possible for your business to increase economic efficiency.

Our core competencies conception, construction and production work for your success!

If you are interested in innovative and sophisticated product solutions in the area of Intralogistics, we would be happy to send you our latest catalogue.



Cargo Liner

This patented system for the flexible transport of materials in smaller batches can be ideally integrated into the material supply of milk run trains.



SLC Trolley

This trolley guarantees an ideal flow of materials in your production plant. SLC Euro trolleys can be used by hand or with a tractor.



Platform Trolley Type X

The platform trolley is used for transporting Euro pallets, grid boxes, industrial pallets, large pallets, etc. in a convoy.




Since virtually every company can use our equipment, but everyone needs „their“ solution, we arrange our products according to specific industrial requirements. Our own development department, which is supported by state-of-the-art 3D CAD systems, allows us to realise individual, customer-specific solutions.

With a wide-ranging offer, we meet every requirement!

If you are interested in innovative and sophisticated product solutions in the area of Industrial Solutions, we would be happy to send you our latest catalogue.



Roller Containers
and Cage Trolleys

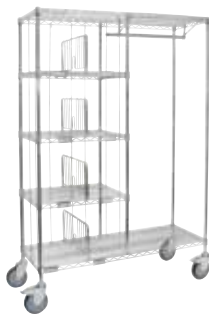

KOMBIX Shelf / Trolley Systems



All-Purpose Collectors



Shelf / Table Trolleys



Contiflex Container



Cabinet Trolleys



Sorting / Mail Delivery Carts




Platform Trolley / Pallet Truck



HERKULEX Hand Trucks



Stacking Boxes

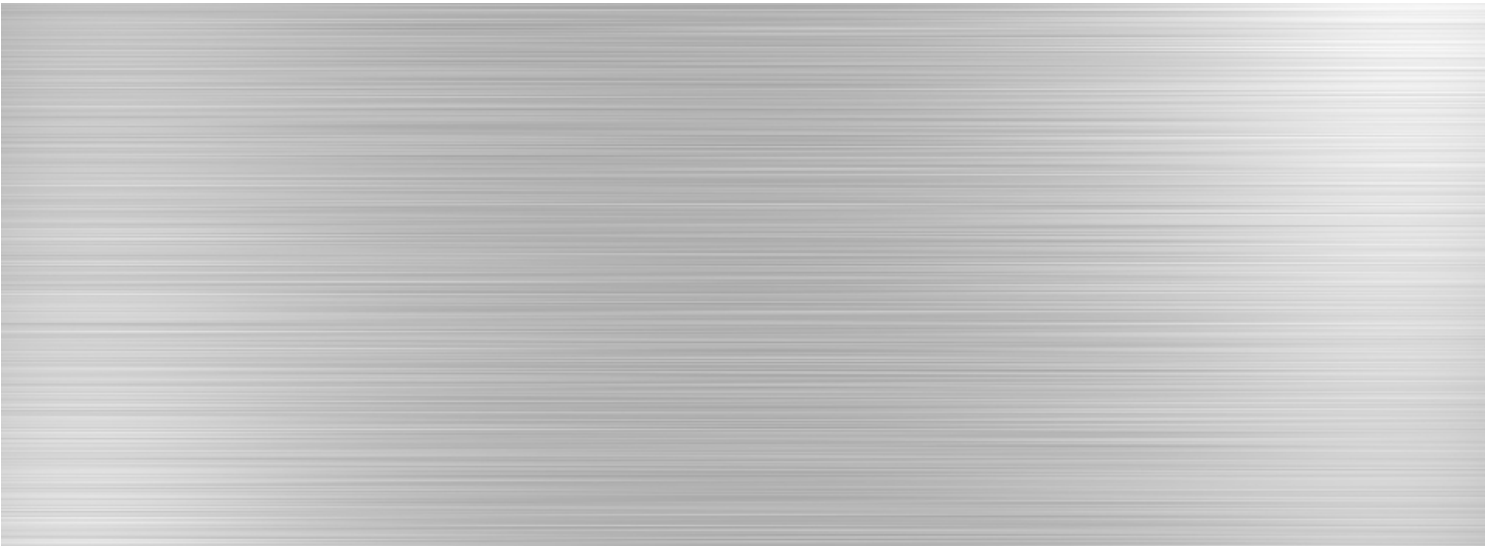

Rolcontainer.mobi
Grote Houw 152
4817 RJ BREDA
Netherlands
tel.: +31633638280
Info@rolcontainer.mobi
www.rolcontainer.mobi

